



ROAD DEVELOPMENT AUTHORITY

Upgrading of Savanne Road (A9) from La Flora to Tyack

Project Brief

1.0 Aim of the project

The long-term goal of the Government is to provide a modern, safe and efficient land transport system and road network for improved connectivity and mobility of the people and goods. In the year 2012, the Road Development Authority (RDA), being the Highway Authority, has upgraded part of the A9 road with the provision of a third lane from Beau Climat to La Flora.

Moreover, the RDA, as part of the Construction of the Dam at Riviere des Anguilles, has undertaken the realignment of part of A9 road from exit of Tyack Village towards Britannia over a length of approximately 600m to cater for 3-lane traffic associated facilities. The RDA has also completed the Bois Cheri Bypass project which will be eventually extended to connect to the A9 road.

In line with the strategic goals of the RDA and in view of a continuation of the above-mentioned completed projects, the RDA is implementing part of the Savanne Road from La Flora to Tyack.

2.0 Project Description

The project will start near Innodis at La Flora and end up at Tyack.

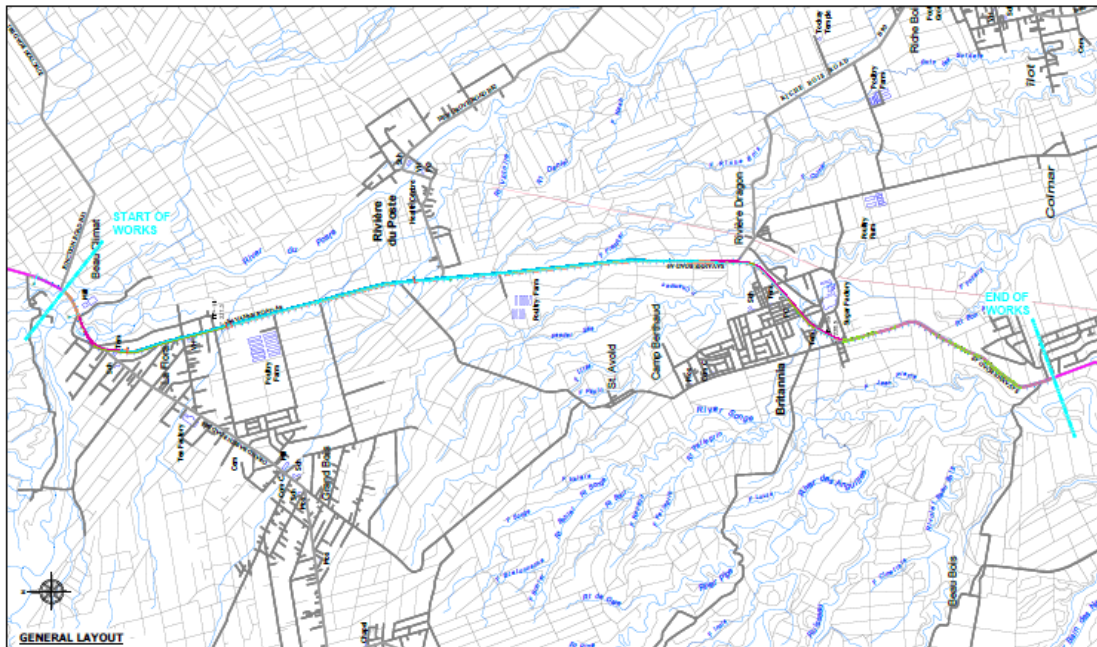


Figure 1: Project layout

3.0 Scope of Works

The Scope of Work includes the following:

- Upgrading of Savanne Road (A9) from La Flora to Tyack.
- Construction of crawler lanes 3.0 m wide from CWA reservoir to junction Riviere du Poste, new traffic scheme at junction Grand Bassin Road (B88) and Savanne Road (A9) and cycle lane of approximately 2.6 meters wide from Riviere du Poste to Britannia.
- Construction of bridge across Riviere Dragon.
- Extension of culvert at Riviere Armand, Riviere du Poste
- Provision of drainage and retaining structures, and upgrading of existing culverts.
- Construction of bus laybys and bus shelters.
- Provision of miscellaneous road equipment such as carriageway markings, traffic signs, handrails, safety fences etc.
- Provision for street lighting.
- Diversion, protection, modification, and relocation of existing utility services.

4.0 Contract Data

Employer:	Road Development Authority
Contractor:	Transinvest Construction Limited
Contract Award:	25 May 2023
Commencement Date:	16 June 2023
Revised Completion Date:	April 2025
Defects Liability Period:	730 days
Contract Sum:	MUR 390,998,850 M (Vat Incl.)